




VisualWall

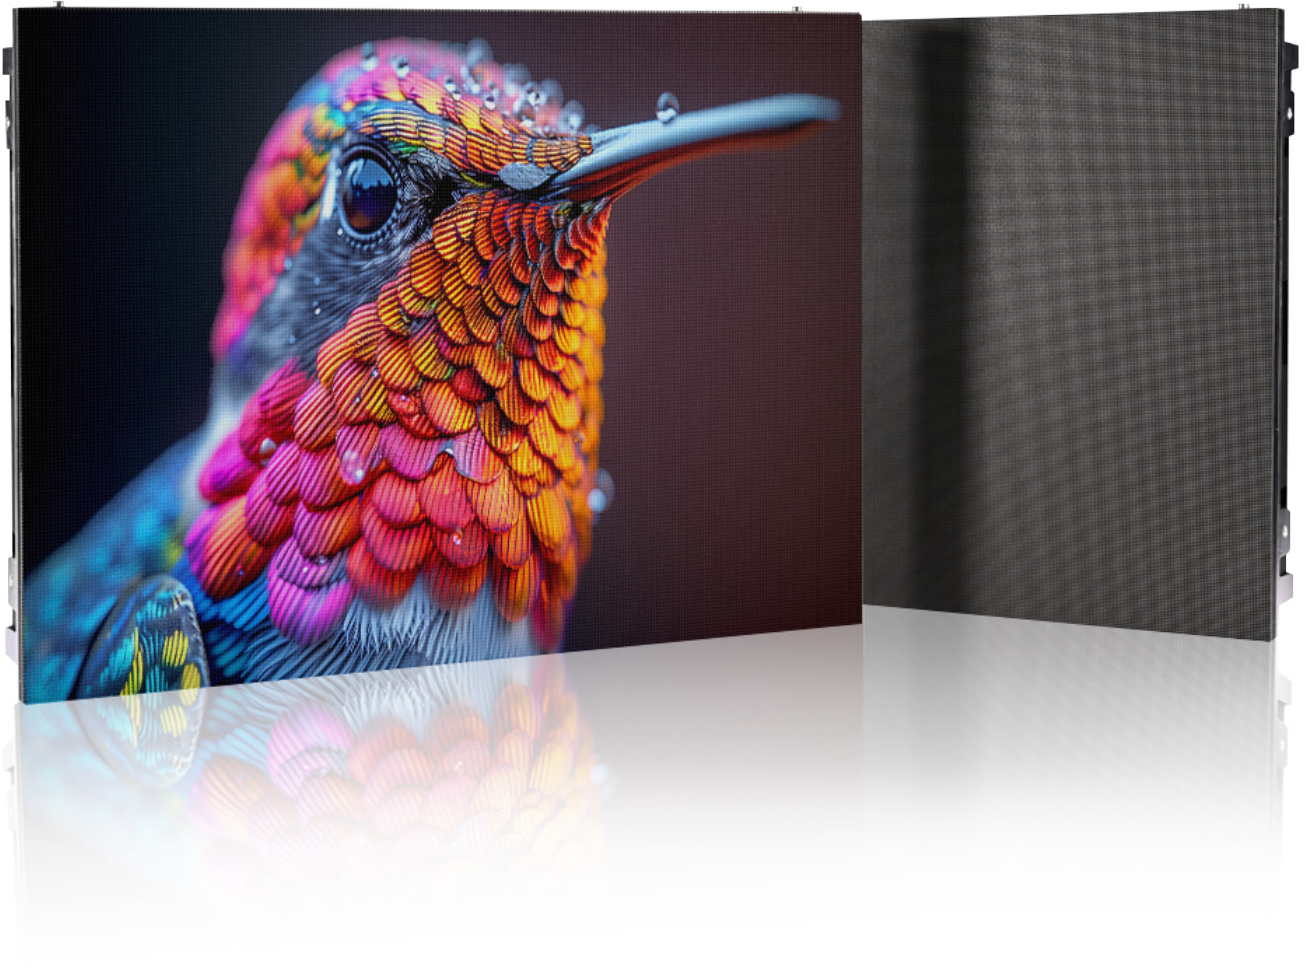

VWX-NPP250

4. Parameter

	Model	VWX-NPP250
Module Parameter	Pixel Pitch(mm)	2.5
	Led	SMD 2121
	Module Resolution(WxH)	128x64
	Module Size (WxHxD, mm)	320x160x15
	Density (dot/m ²)	160,000
	Flatness (mm)	≤1
	Maintenance	Front
	Material	Plastic Bottom Shell
Optical Parameter	Single-dot brightness calibration	Available
	Single-dot color calibration	Available
	Brightness (cd/m ²)	≥600
	Color Temp(K)	3200-9300 Adjustable
	Viewing Angle (H/V,°)	160/140
	Emitting point center distance deviation	<3%
	Brighness/Color uniformity	≥95%
	Contrast Ratio	5000:1
Electrical Parameter	Max Power Consumption(W/m ²)	360
	Avg Power Consumption(W/m ²)	123
	Power Supply	110-220VAC±15%
Processing Parameter	Driver Mode	Constant Current
	Scan Rate	32
	Frame Rate(Hz)	60
	Refresh Rate(Hz)	1920/3840
	Color Depth(bits)	12~14
Operating Parameter	Receiving Card	HUB 75
	Lifespan(hr)	≥100000
	Operating Temp(°C)	-10~40
	Storage Temp(°C)	0~30
	Operating Humidity(%RH)	10%~65%
	Storage Humidity(%RH)	10%~60%

5. Compatible Cabinet



640x480 mm
Die-cast aluminum

640x640 mm
Die-cast aluminum

